



Design Center & Office

KD Center, 355, Hyoryeong-ro,
Seocho-gu, Seoul, 06643 Korea
Tel +82-2-520-7600
Fax +82-2-598-9674

NOX Corp. | KOREA

Shinho Factory
Shinho 2nd Factory, Yedang
Enbo Factory
Godeok Factory
Bongsan Factory
Deoksan Factory
Choongnam, Korea

NOX US | USA

NOX US
P.O.Box 824
931 S. Springville Avenue
Fostoria, OH 44830
Office +01-419-701-5060
Fax +01-419-701-5058

www.noxglobal.com
info@noxglobal.com



Please visit www.noxglobal.com for the detailed installation,
maintenance guides and technical information.



Global Click LVT Pioneer since 2005

Global Click LVT Pioneer since 2005

Proven Click LVT installed in global market mainly for heavy commercial installation with its unique structure of unparalleled dimensional stability and patented click joint system, 'Click'n go and Drop'n go!®'

ECOCLICK+
EASIEST & STRONGEST GLUELESS LVT

ECOCLICK+ Difference


With NOX EPT™ Shield & EMT™ Core Technologies

NOX Corporation, one of the world-largest LVT manufacturers, traces its roots to chemical engineering with expertise in core components of LVT flooring for more than 50 years. Its NOX EPT™ shield & EMT™ core technologies are the foundation of ECOCLICK+ innovation, providing the most stable and eco-friendly products.

Proven Innovation of ECOCLICK+ since 2005


1. Unique patented Click'n go and Drop'n go!® click system

- The easiest and strongest click system in the market

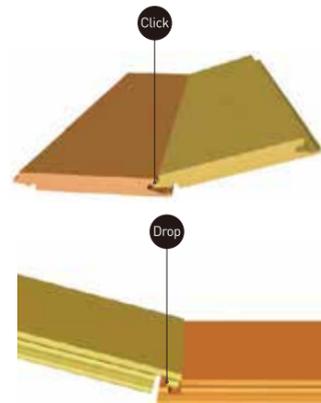

2. Distinguished NOX EMT™ Core Technology

- Ensures the unparalleled dimensional stability and extra sound absorption of ECOCLICK+

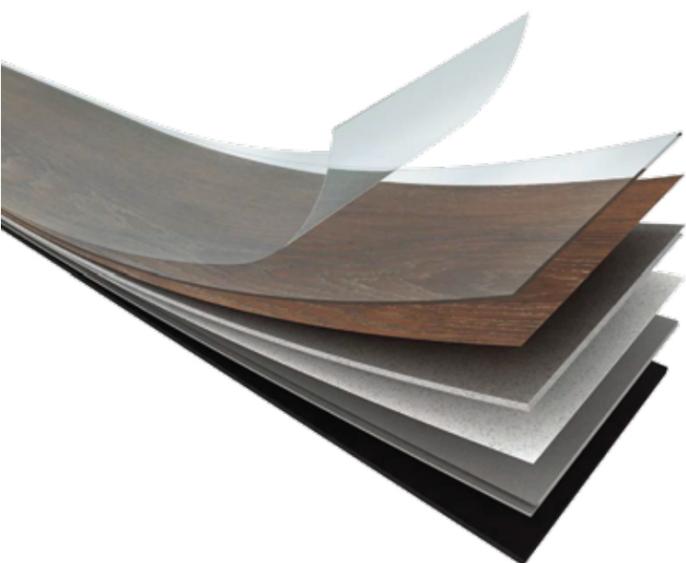

EPT™ shield

- Safe and strong 2-fold LVT surface shield technology
- PU or Ceramic PU coating treatment [Anti-Bacterial] without using Nano-silver [controversial to be harmful for human health]
- Clear design protection layer



EMT™ core-6C

- Stable and eco-friendly LVT core technology
- 6-layered EMT™ core structure for long-term dimensional stability



Advantages of ECOCLICK+



Most diverse click sizes

- 2 plank click sizes including grande plank size
- 2 tile sizes including grande tile size



Superior dimensional stability with

- NOX EPT™ shield & EMT™ core technologies
- Fiberglass stabilization layer



Unique patented Click'n go and Drop'n go!® click system

- The easiest and strongest click system in the market



Easy to install, replace, and remove



Silent and soft floor



Certified low VOCs and non-phthalate technology



100% recyclable



Ultra water-resistant



Suitable for heated floor



Easier maintenance than traditional laminated wood and natural stone flooring



HD design

Unique 'Built-In-Grout' Click System of ECOCLICK+

Just click and the natural grout line will appear, allowing for the natural elegance of stone and ceramic tiles to shine.



ECOCLICK+ PLANK

Grande size of wood plank creating
a truly natural and distinctive look

Dimension
185 X 1,212 mm / 235 X 1,505 mm

Total Thickness
5 mm

Plank

Dimension
185 X 1,212 mm

Antique Oak | Beige

Embossed-In-Register | NCP-40418



European Oak | Brown Grey

NCP-23365



Antique Oak | Brown

Embossed-In-Register | NCP-40405



Hospitality | Antique Oak | NCP-40405

Plank

Dimension

185 X 1,212 mm

Century Oak | Natural

Embossed-In-Register | NCP-45404



Hickory | Golden

Embossed-In-Register | NCP-31219



European Oak | Golden

NCP-5122



Hickory | Brown

Embossed-In-Register | NCP-6430



Century Oak | Dark Brown

Embossed-In-Register | NCP-45403



Hickory | Brown

Embossed-In-Register | NCP-6431



Plank

Dimension
185 X 1,212 mm

Century Oak | Grey

Embossed-In-Register | NCP-45405



Hickory | Grey

Embossed-In-Register | NCP-31217



Antique Oak | Grey

Embossed-In-Register | NCP-40428



Restaurant | Hickory NCP-31217

Grande Plank

Dimension
235 X 1,505 mm



Residential | Antique Oak NCG-40115

Antique Oak | Golden

NCG-40115



Antique Oak | Dark Brown

NCG-40108



Residential | European Oak NCG-5121

European Oak | Golden

NCG-5120



European Oak | Brown

NCG-5121



Grande Plank

Dimension

235 X 1,505 mm



Corporate Office | Grand Oak NCG-6310

Grand Oak | White

NCG-6310



Grand Oak | Black

NCG-6311



ECOCLICK+ TILE

Unique size options of concrete and stone tile with a natural delicacy

Dimension
305 X 610 mm / 462 X 925 mm

Total Thickness
5 mm

Corporate Office | Concrete NCI-42502

Tile

Dimension
305 X 610 mm



Retail Shop | Stone NCI-26067

Stone | Light Grey

NCI-26057



Stone | Grey

NCI-26067



Residential | Proto Concrete NCI-3001

Proto Concrete | White

NCI-3001



Proto Concrete | Grey

NCI-3002



Grande Tile

Dimension
462 X 925 mm

Concrete | Dark Grey

NCI-42502



Concrete | Black

NCI-42504



Hospitality | Concrete NCI-42504



Residential | European Oak NCP-23365

Plank



NCP-40418



NCP-23365



NCP-40405



NCP-45404



NCP-31219



NCP-5122



NCP-6430



NCP-45403



NCP-6431



NCP-45405



NCP-31217



NCP-40428



NCG-40115



NCG-40108



NCG-5120



NCG-5121



NCG-6310



NCG-6311

Tile



NCI-26057



NCI-26067



NCI-3002



NCI-3001



NCI-42502




NCI-42504

Diverse Design Solution

Surface Embossing

ECOCLICK+ with 5 different surface embossing textures including natural Embossed-In-Register

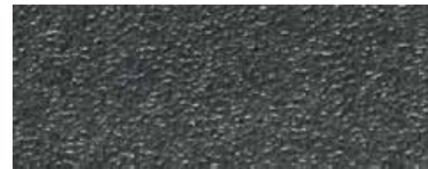

I-03 Sand structure




I-14 Wood structure



I-19 Rustic wood structure



I-22 Wood structure

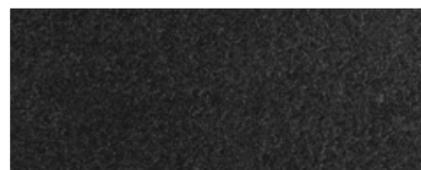


I-34 Stone structure

Easy & Quick Installation

1. Unpack



2. Angle & Click

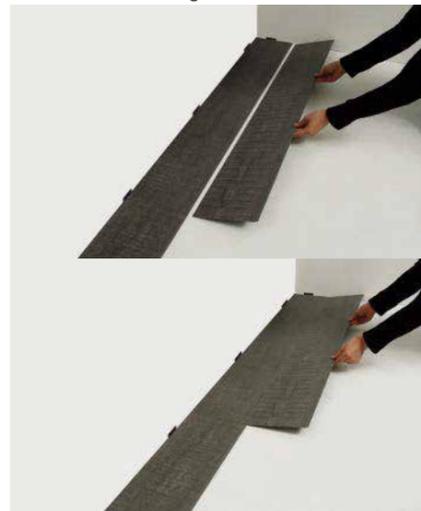


3. Drop & Click



The First in LVT, "Built-In-Grout" Available

When installed, the natural grout line will appear, allowing for the natural elegance of stone and ceramic tiles to shine. **ECOCLICK+** can be supplied in grout type according to your request.

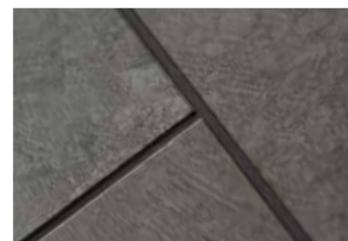

Technical Information

Installation Guidelines

- Prior to installation, the subfloor must be heated for 14days if heating is available, and if not, allow sufficient time to dry out completely.
- Room temperature must be maintained at 18°C or higher before and during installation.
- The flooring must be allowed to acclimate in the room to be installed for a minimum of 24 hours and be stacked flat on the floor to avoid bending the floor.
- Prior to installation, please ensure that both color and lot# are the same.
- When installing **ECOCLICK+**, be sure to keep dust, dirt or foreign particles away from the locking strip.

Maintenance

- Regularly sweep floor to remove sand and grit that can scratch floor.
- For best results, use only water with a mop. Avoid flooding the floor with too much water.
- For heavily soiled areas, use a neutral ph balanced floor cleaner.
- Use caution when lifting boxes.
- Promptly remove any standing water to avoid slippage.
- Keep **ECOCLICK+** on the flat surface to keep it from warping

Size & Packing

Brand	Thickness [mm]	Wear layer	Size [mm]	Pcs/Box	Sqm/Box
ECOCLICK+	5	0.30mm / 0.55mm	185 X 1,212	8	1.79
			235 X 1,505	6	2.12
			305 X 610	10	1.86
			462 X 925	6	2.56

Test Result

Product Specification	Standard	ECOCLICK+
Surface treatment (NOX EPT™ Shield)	ISO 22196 ASTM G21-15	Anti-Bacterial Anti-Fungi
Level of Use	ISO 10874	0.30mm : 23, 31
		0.55mm : 23, 33, 42
Total thickness	ISO 24346	+0.13mm / -0.10mm
Wearlayer Thickness	ISO 24340	+13% / -10%
Weight [g/m²]	ISO 23997	+13% / -10%
Dimensional stability & Curling after exposure to heat	ISO 23999	≤0.10%
		≤1.0mm
Abrasion group	EN 660-2	Class T
Castor Chair resistance	ISO 4918	No damage
Squareness & Straightness	ISO 24342	≤400mm : ≤0.25mm
		>400mm : ≤0.35mm
Residual indentation	ASTM F2055	≤0.01in
		ISO 24343-1
Height difference between with a locking system on the edges	ISO 10582	≤0.1mm
Static Load Limit	ASTM F970	≤0.005in @ 250psi min
Light Fastness	ISO 105-B02	≥6
Slip resistance	EN 13893	DS
	DIN 51130	R10
Impact Sound Reduction	EN ISO 10140-3	9 db
Resistance to Chemicals	ISO 26987	No defects
Thermal resistance	EN 12667	0.017 [m²K]/W
Fire resistance	EN 13501-1	Bfl-s1
Body Voltage	EN 1815	≤2kV
Peel resistance	ISO 24345	More than 60N/50mm
Formaldehyde Group	EN 717-1	E1
VOC emissions	IAC GOLD CERTIFIED FLOOR SCORE CERTIFIED	Very low VOC

